



# ETP-WM WALL MOUNT SERIES





TALKAPHONE'S WALL MOUNT IS AN IDEAL SECURITY SOLUTION FOR REMOTE AND HIGH-RISK AREAS. THE WALL MOUNT OFFERS CONTEMPORARY ARCHITECTURAL STYLING AND IS CONSTRUCTED OF DURABLE 316 MARINE GRADE STAINLESS STEEL. AN ALWAYS-LIT LED BLUE LIGHT PROVIDES HIGH VISIBILITY AND GIVES PASSERS-BY A SENSE OF SECURITY. WHEN INSTALLED WITH A CALL STATION, USERS CAN CALL EMERGENCY PERSONNEL WITH A SIMPLE PUSH OF A BUTTON.

## FEATURES

- Attention-getting LED blue light is included and mounted inside a polycarbonate housing. The LED blue light is continuously lit and flashes for the duration of a call to draw attention to a unit when "EMERGENCY" button is pressed.
- Emergency phone faceplate is illuminated at all times by an LED panel light (ETP-WM only)
- Vandal-resistant marine grade 316 stainless steel construction
- Rated NEMA 3R to resist outdoor weather conditions
- A variety of signage, graphics, and color choices are available
- Easily mount any flush mounting Talkaphone, ETP-520 Series, VOIP-500 Series, or VOIP-600 Series Call Station into the unit (sold separately)
- Economy model (ETP-WM/E) and wall mount model with emergency trip push button switch (ETP-WM-TPK-IP66) available.

\*Call Station sold separately




## GENERAL SPECIFICATIONS

ETP-WM Series	
	
Construction:	Brushed marine grade (316) stainless steel with impact- and UV-resistant polycarbonate lens.
Dimensions (W x H x D):	10.5 x 32.0 x 8.0 in. (267 x 813 x 203 mm) with 1-inch radius corners
Weight:	41 lbs. (18.5 kg)
Operating Temperature:	-40° F to +131° F (-40° C to +55° C)
Protection Rating:	IP55, NEMA 3R
Mounting:	Mounts to a wall (standard) or straps to a pole or a kiosk (requires available <b>ETP-PMKT-1</b> pole mounting kit—see <b>Accessories</b> ).
Power:	LED Blue Light: 12/24 VDC or 120VAC (selected at time of order) LED Panel Light: 1.2 watts, 12-24 VDC/VAC, 120VAC
Lighting:	LED Blue Light: 78 flashes per minute, 70% of initial lumens after 50,000 hours of operation. LED Panel Light: Ultra bright LEDs, 50,000 hour lifetime.
Finish:	Brushed stainless steel is standard. Available painted in custom colors.
Lettering:	2-inch high reflective red “EMERGENCY” lettering with wide-angle visibility is standard. Available as “ASSISTANCE”, “INFORMATION”, or custom lettering, colors, and graphics.
Approvals:	ETL Recognized Component — Conforms to UL Standards 60950-1 and 60950-22. Certified to CSA Standard C22.2 Nos. 60950-1 and 60950-22. 
Warranty:	2-year limited warranty for lighting electronics 5-year limited warranty for wall mount

All specifications are subject to change without notice.

\*Call Station sold separately

## GENERAL SPECIFICATIONS

	ETP-WM-TPK-IP66	ETP-WM/E
		
<b>Construction:</b>	Brushed marine grade (316) stainless steel with impact- and UV-resistant polycarbonate lens.	Brushed marine grade (316) stainless steel with impact- and UV-resistant polycarbonate lens.
<b>Dimensions (W x H x D):</b>	10.7 x 32.2 x 9.8 in. (272 x 818 x 249 mm) with 1-inch radius corners	10.5 x 32 x 8 in. (266 x 812 x 203 mm)
<b>Weight:</b>	49 lbs. (22.2 kg)	41 lbs. (18.5 kg)
<b>Operating Temperature:</b>	-40° F to +131° F (-40° C to +55° C)	-40° F to +131° F (-40° C to +55° C)
<b>Protection Rating:</b>	IP66	IP55, NEMA 3R
<b>Mounting:</b>	Mounts to a wall (standard) or straps to a pole or a kiosk (requires available <b>ETP-PMKT-1</b> pole mounting kit—see <b>Accessories</b> ).	Mounts to a wall (standard) or straps to a pole or a kiosk (requires available <b>ETP-PMKT-1</b> pole mounting kit—see <b>Accessories</b> ).
<b>Power:</b>	120VAC or 240VAC (selected at time of order)	LED Blue Light: 12/24 VDC or 120VAC (selected at time of order)
<b>Lighting:</b>	LED Blue Light: 78 flashes per minute, 70% of initial lumens after 50,000 hours of operation. LED Panel Light: Ultra bright LEDs, 50,000 hour lifetime.	LED Blue Light: 78 flashes per minute, 70% of initial lumens after 50,000 hours of operation.
<b>Finish:</b>	Brushed stainless steel is standard. Available painted in custom colors.	Brushed stainless steel is standard. Available painted in custom colors.
<b>Lettering:</b>	2-inch high reflective red “EMERGENCY” lettering with wide-angle visibility is standard. Available as “ASSISTANCE”, “INFORMATION”, or custom lettering, colors, and graphics.	2-inch high reflective red “EMERGENCY” lettering with wide-angle visibility is standard. Available as “ASSISTANCE”, “INFORMATION”, or custom lettering, colors, and graphics.
<b>Approvals:</b>		ETL Recognized Component — Conforms to UL Standards 60950-1 and 60950-22. Certified to CSA Standard C22.2 Nos. 60950-1 and 60950-22.  Intertek
<b>Warranty:</b>	2-year limited warranty for lighting electronics 5-year limited warranty for wall mount	2-year limited warranty for lighting electronics 5-year limited warranty for wall mount

All specifications are subject to change without notice.

\*Call Station sold separately

## ORDERING INFORMATION

	Model Series	Wireless Provisions	Fixed Camera	Operating Voltage	Paint Finish	Lettering
	ETP-WM	<b>[Leave Blank]</b> Not configured with provisions for cellular antenna or interface  <b>-W</b> Supports a panel mount (through-hole) antenna and provides an internal mounting panel for a cellular interface	<b>[Leave Blank]</b> Not configured for a fixed camera  <b>-OP2</b> Ready for a fixed camera above the call station opening  <b>-OP3IP</b> Includes an Axis M1135 or equivalent IP-based fixed camera above the call station opening	<b>[Leave Blank]</b> Configured for 120VAC  <b>-24</b> Configured to support 12VDC or 24V AC/DC	<b>[Leave Blank]</b> Brushed stainless steel (not painted)  <b>-BL</b> Painted "Safety Blue" (RAL 5015)  <b>-RD</b> Painted "Safety Red" (RAL 3000)	<b>[Leave Blank]</b> Reflective lettering (specify color and verbiage at time of order)  <b>-NL</b> Lettering not included and not applied  <b>-EMRBK</b> "EMERGENCY" lettering in "Black" (not available for units painted in "Safety Blue")  <b>-EMRRD</b> "EMERGENCY" lettering in "Red" (not available for units painted in "Safety Red")  <b>-EMRWH</b> "EMERGENCY" lettering in "White"
Example #1	ETP-WM					-EMRRD
Example #2	ETP-WM		-OP3IP	-24	-BL	-EMRWH

	Model Series	Operating Voltage	Paint Finish	Lettering
	ETP-WM-TPK-IP66	<b>-120</b> Configured for 120VAC  <b>-240</b> Configured for 240VAC	<b>[Leave Blank]</b> Brushed stainless steel (not painted)  <b>-BL</b> Painted "Safety Blue" (RAL 5015)  <b>-RD</b> Painted "Safety Red" (RAL 3000)	<b>[Leave Blank]</b> Reflective lettering (specify color and verbiage at time of order)  <b>-NL</b> Lettering not included and not applied  <b>-EMRBK</b> "EMERGENCY" lettering in "Black" (not available for units painted in "Safety Blue")  <b>-EMRRD</b> "EMERGENCY" lettering in "Red" (not available for units painted in "Safety Red")  <b>-EMRWH</b> "EMERGENCY" lettering in "White"
Example #1	ETP-WM-TPK-IP66	-240		-EMRBK
Example #2	ETP-WM-TPK-IP66	-120	-BL	

	Model Series	Fixed Camera	Operating Voltage	Paint Finish	Lettering
	ETP-WM/E	<b>[Leave Blank]</b> Not configured for a fixed camera  <b>-OP2</b> Ready for a fixed camera above the call station opening  <b>-OP3IP</b> Includes an Axis M1135 or equivalent IP-based fixed camera above the call station opening	<b>[Leave Blank]</b> Configured for 120VAC  <b>-24</b> Configured to support 12VDC or 24V AC/DC	<b>[Leave Blank]</b> Brushed stainless steel (not painted)  <b>-BL</b> Painted "Safety Blue" (RAL 5015)  <b>-RD</b> Painted "Safety Red" (RAL 3000)	<b>[Leave Blank]</b> Reflective lettering (specify color and verbiage at time of order)  <b>-NL</b> Lettering not included and not applied  <b>-EMRBK</b> "EMERGENCY" lettering in "Black" (not available for units painted in "Safety Blue")  <b>-EMRRD</b> "EMERGENCY" lettering in "Red" (not available for units painted in "Safety Red")  <b>-EMRWH</b> "EMERGENCY" lettering in "White"
Example #1	ETP-WM/E	-OP2			-EMRRD
Example #2	ETP-WM/E		-24	-BL	

## ACCESSORIES


**Pole Mounting Kit:** Order Model ETP-PMKT-1 for strapping wall mounts to a pole.

**Strapping Tool:** Order Model ETP-PMKT-TOOL for use with ETP-PMKT-1 Pole Mounting Kit.


DIMENSIONAL DRAWING – MODEL ETP-WM

All dimensions are in inches and are provided for reference only.


\*Call Station sold separately

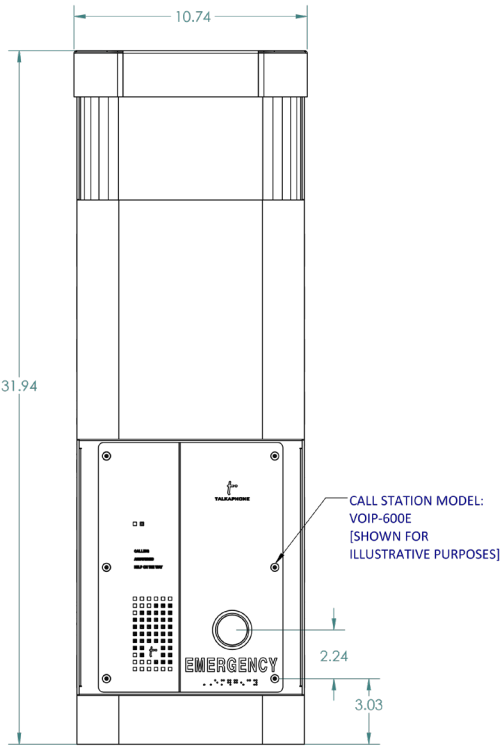


FRONT VIEW

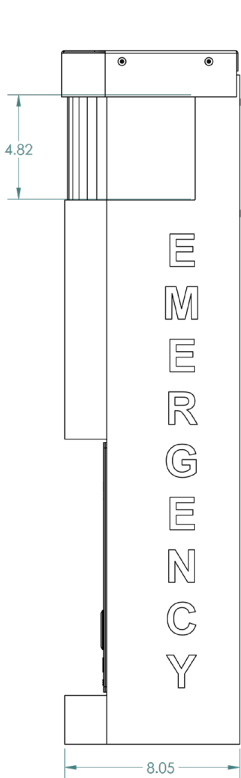


SIDE VIEW

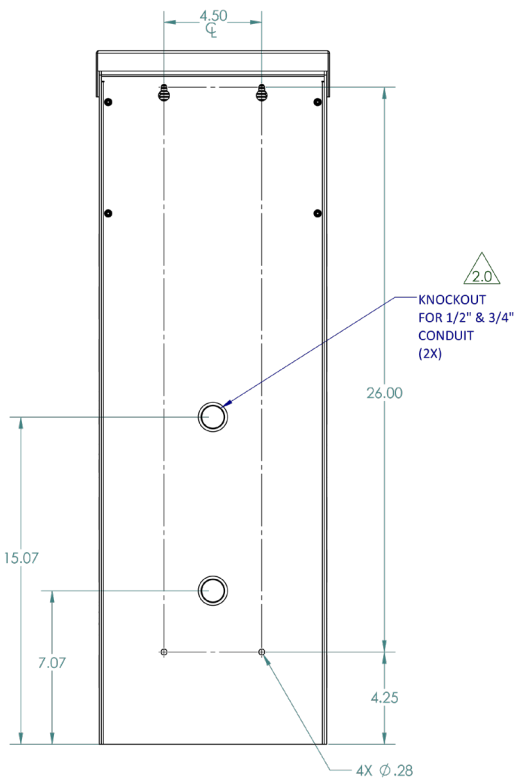

REAR VIEW

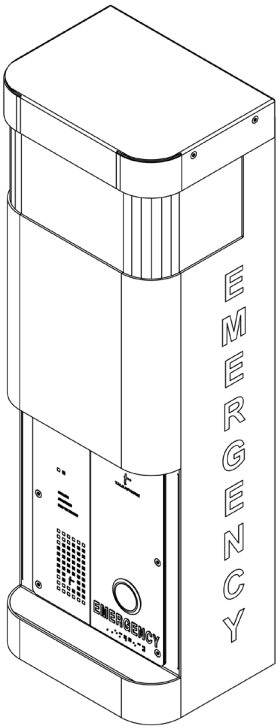

ISOMETRIC VIEW

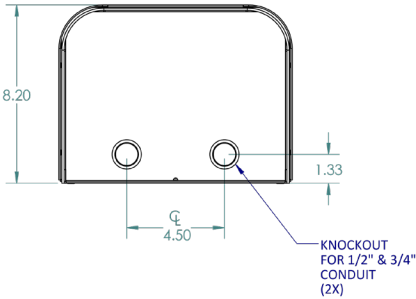




**DIMENSIONAL DRAWING – MODEL ETP-WM-TPK-IP66**

All dimensions are in inches and are provided for reference only.

\*Call Station sold separately

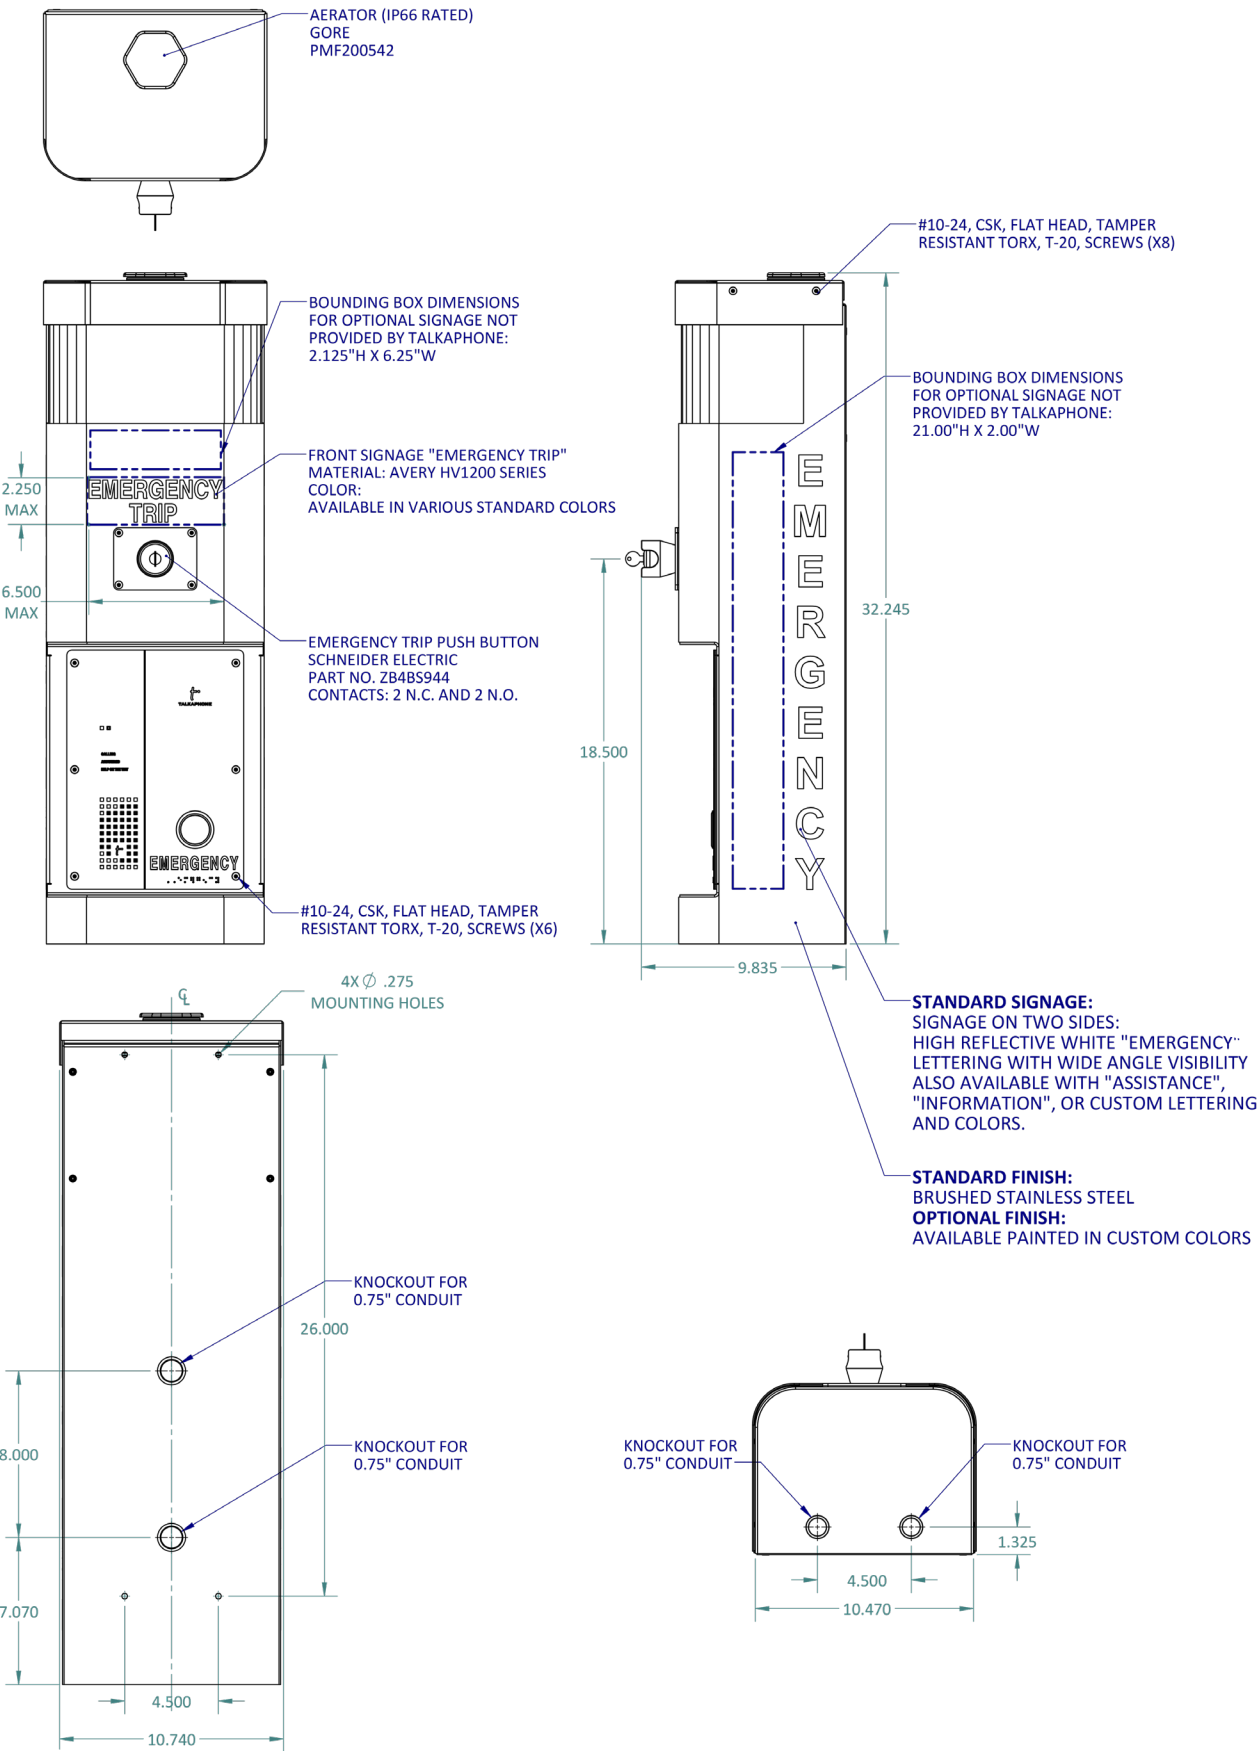

**\*Call Station sold separately**

