

**WEBS-PA-2A – Outdoor Area  
Paging Unit For Analog WEBS®**

**Description**

Talk-A-Phone's WEBS-PA-2A Outdoor Area Paging Unit for analog WEBS is an ideal security solution for outdoor areas where wide-area audio broadcast is desired. The unit can be used as part of the Talk-A-Phone's Wide-Area Emergency Broadcast System (WEBS®) to notify large masses of people of an event with an intelligent message.

Talk-A-Phone's WEBS-PA-2A Outdoor Area WEBS Paging Units are often used at university and college campuses, shopping malls, medical centers, industrial campuses and corporate facilities.

**Features**

- Remotely broadcast audio messages to a single unit, a group of units, or all at once through WEBS Zone Paging System (WEBS-ZPS)
- Two concealed high-power side speakers provide 180° coverage
- Attractive enclosure provides contemporary architectural styling
- Designed to resist extreme weather conditions

**Specifications**

Dimensions (W x D x H):	12.5 x 10.1 x 19.7 in. (318 x 258 x 501 mm)
Weight:	30 lbs. (13.6 kg)
Construction:	16GA (.0625 in.) brushed stainless steel
Audio Broadcast:	Two 40 watt speakers, 118 dBA @ 1 meter
Power:	Maximum total 24 watts, 110-240VAC/12VDC
Mounting:	Mounts to a wall or straps to a pole or a kiosk
Warranty:	2-year warranty



# WEBS-PA-2A – Outdoor Area Paging Unit For Analog WEBS®

## Accessories

Zone Paging System:

Order **WEBS-ZPS** modular telephone zone paging and control system to broadcast audio messages to analog WEBS stations.

Zone Paging Module:

Order **WEBS-ZPM-9** Zone Paging Module to add support for additional nine paging zones. Up to ten WEBS-ZPM-9 modules may be added.


Pole Mounting Kit:

Order **ETP-PMKT** Pole Mounting Kit for strapping WEBS-PA-2A to a pole.

Strapping Tool:

Order **ETP-PMKT-TOOL** Strapping Tool for use with **ETP-PMKT** Pole Mounting Kit.

## Dimensional Diagram

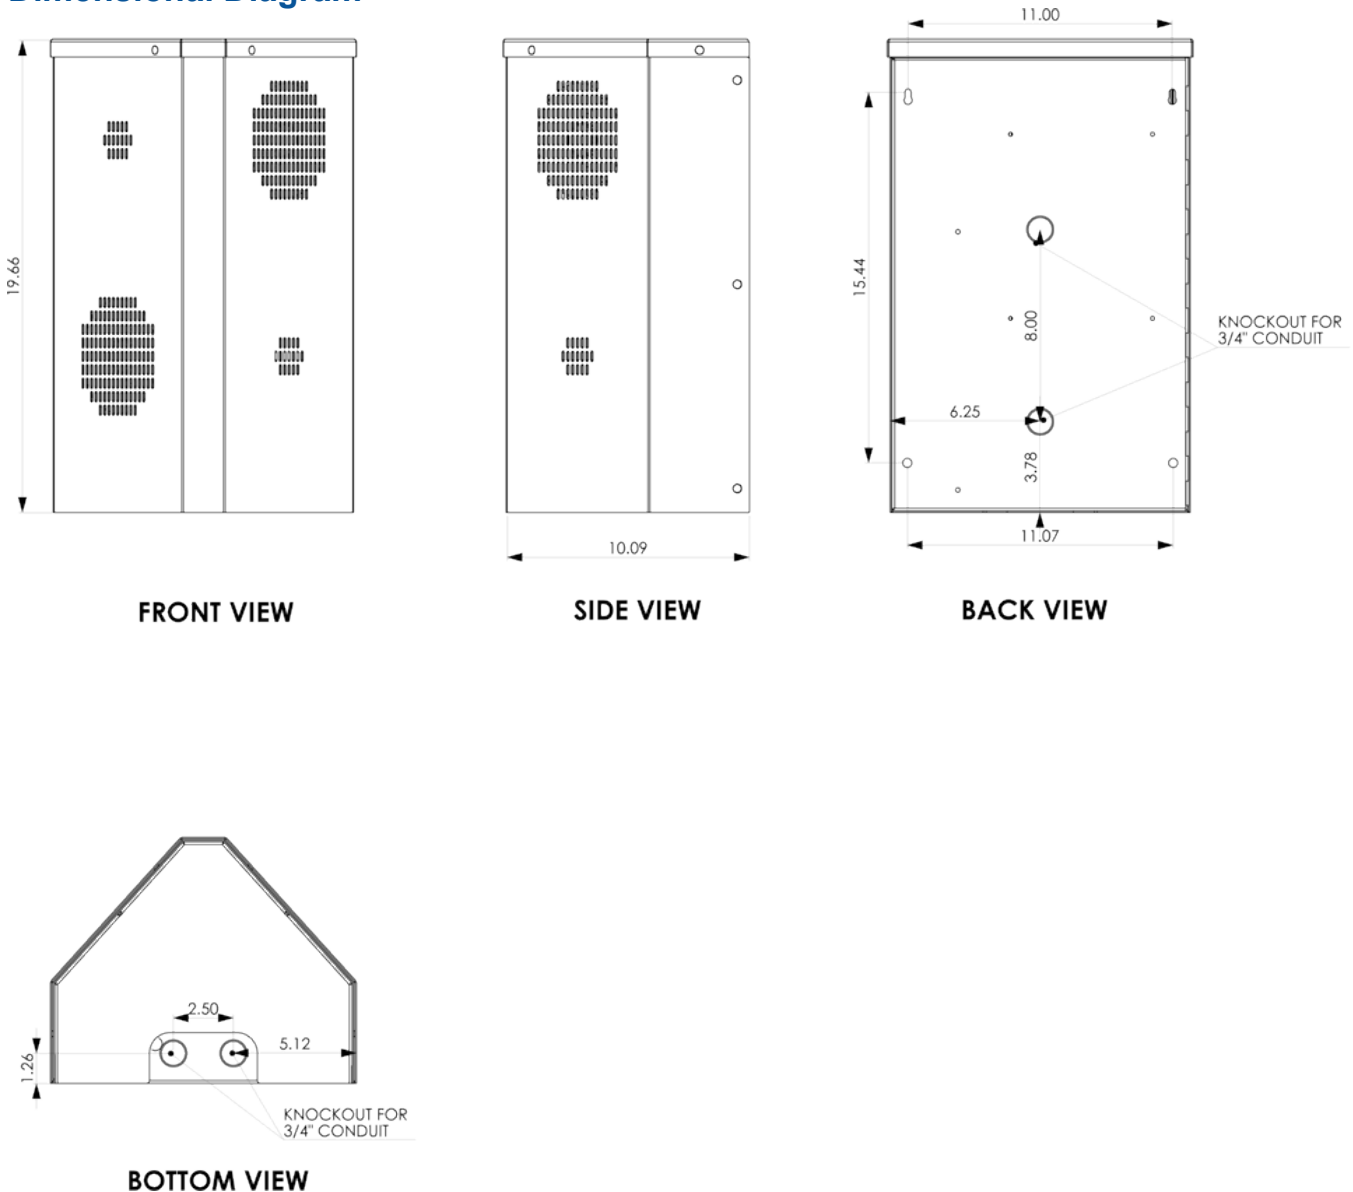

All dimensions are in inches and are provided for reference only.